

EVERYDAY STANDARD METAL FACED BEAD FRAME - UNI/CTMB/DD



Our Double Door Non Fire Rated Access Panels incorporate features that make it a versatile option, fitted with restraining cables on the larger door sizes for added safety when opening.

Our unique patented Unihatch design, offers a range of in-built options within a compact and lightweight unit. Our flexible hinge system allows the two doors to be removed quickly from its frame if required.



Non Fire Rated
 Simple yet flexible Unihatch design



Durable
 Made from quality Zintec



Maximum Protection
 Fully Polyester Powder Coated



Locks
 Fitted with budget locks concealed in door

Composition

- Frame** ▶ 1mm zintec welded construction
- Door** ▶ 1mm zintec folded all sides for rigid door shell
- Coating** ▶ Fully Polyester Powder Coated RAL9010 Matt White
Other colours available
- Lock** ▶ Budget Lock as standard
Other locks available: tamper proof, key retaining, touch latch, 3 way lock, Europrofile ready etc.
- Depth** ▶ Frame Depth: 56mm - Door Depth: 32mm



Building Regulations

- Part L** ▶ **Thermal Resistance**
 BS EN ISO 10077-1:2006
 by Exova Warrington

Installer must follow guidelines set by the wall or ceiling manufacturer to ensure the correct properties are achieved for the environment. All reports have been produced by independent UKAS accredited testing centres, further details available upon request.

DISCLAIMER All suggestions on the use of our products within this document are made in good faith and without guarantee since the conditions of use are beyond the control of Ceildoor Products Limited. It is the installer's responsibility that: our products are installed according to the ceiling or wall manufacturer's recommendations related to access hatches; and are fit for its intended purpose before it is installed. We do not accept any liability for any loss, damage or claims arising from faulty or defective installation or the improper use of our goods. Ceildoor Products Limited pursue a policy of continuous product development and reserves the right to amend specifications without prior notice, please quote the issue number of this document to ensure the correct model of Access Panel is being specified.

EVERYDAY STANDARD METAL FACED BEAD FRAME - UNI/CTMB/DD

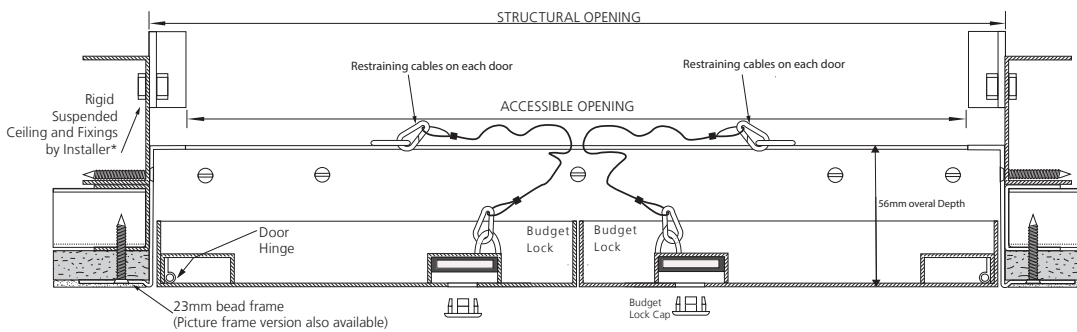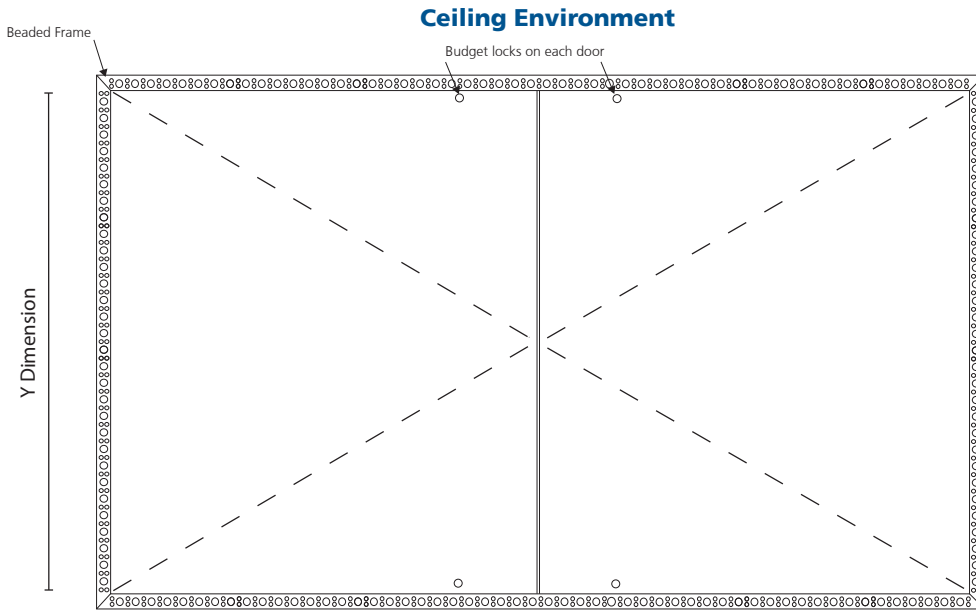

Ceiling Installation Example



Fitting Guidelines

To calculate a sufficient opening for the frame, we recommend adding 10mm to the door size supplied. Alternatively when ordering an Access Panel to suit an opening, take away 10mm from your opening dimension to calculate a door size.



Frame should be screw fixed into the wall or ceiling opening using fixing holes located on the sides of the frame.

It is recommended that sufficient independent bracing and support is obtained to ensure safe opening and closing of the access hatch within its environment.

Please Note:

Drawing not to scale, reference purposes only. Components shown with an asterisk (*) are suggestions only. Always refer to guidance provided by your wall or ceiling manufacturer.

Legend

-  Plaster skim
-  Plasterboard

Examples of Shape and Sizes

See examples below. Use our bespoke enquiry manufacturing service for your size or shape. Simply contact us with further details

Door Size (mm)	Door Type	Structural Opening (mm)	Accessible Opening (mm)
900 x 600	Double	910 x 610	870 x 570
1200 x 600	Double	1210 x 610	1170 x 570
1200 x 1200	Double	1210 x 1210	1170 x 1170
2000 x 1000	Double	2010 x 1010	1970 x 970

Note: The above sizes are examples of sizes that can be made to order, these items are bespoke and therefore are subject to lead times. Please contact our sales department for further details.

Extra Protection Against Moisture and Corrosion

All Ceildoor metal Access Panels and hatches are fully powder-coated white RAL 9010 in matt polyester paint. Even though the majority of Access Panels in the industry are used internally, Ceildoor ensures all our products are coated in full polyester powder which is normally recommended for general exterior situations, where good weathering resistance is required against high levels of atmospheric

Security and Safety

It is extremely important to close and lock the Access Panel or hatch immediately after use. Failure to do so will affect and impair the performance of the environment where it has been installed in the