01902 733 645
accesshatch.com
sales@ceildoorproducts.co.uk

ILLUSION

THE SHAPE OF THINGS TO COME

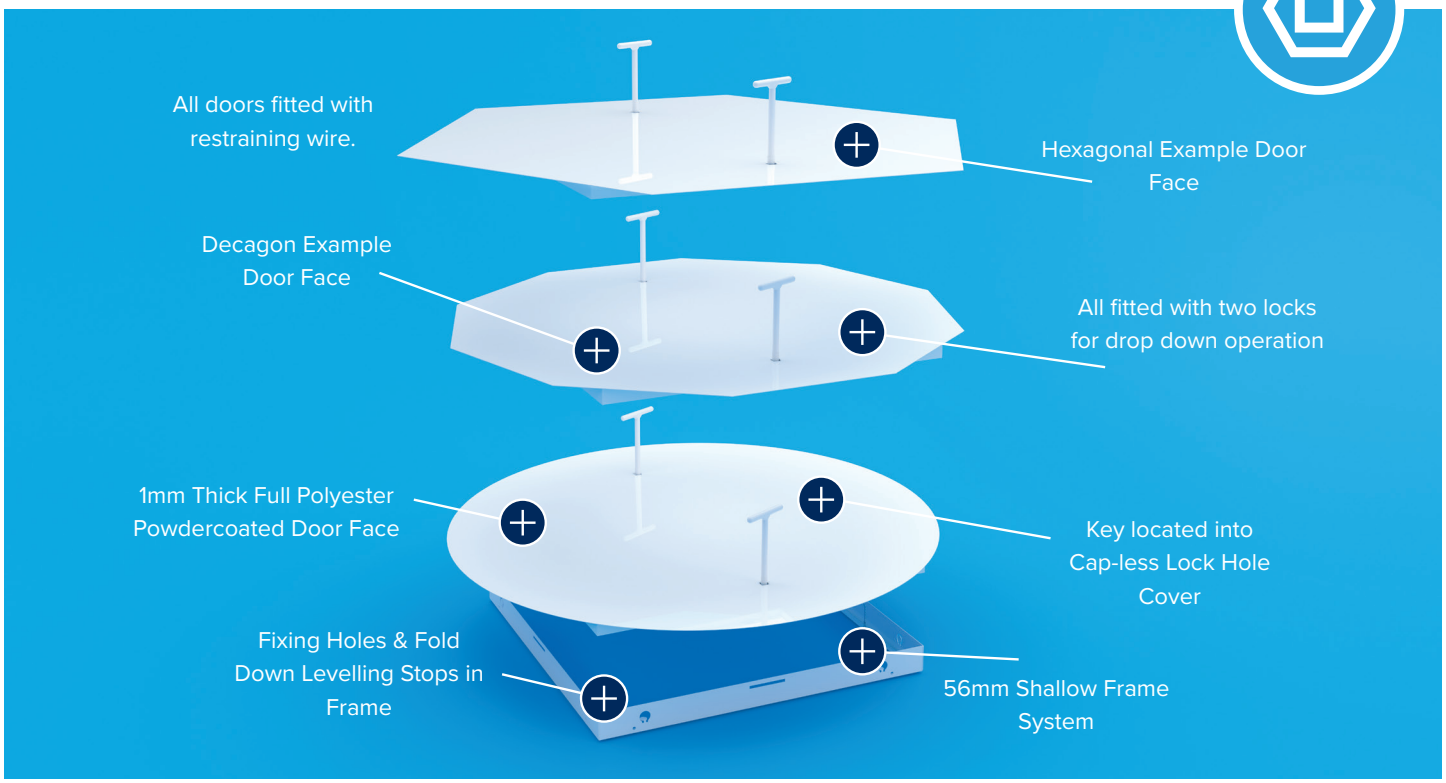

Our Illusion Access Panel has been designed to accommodate customers who are looking for special sized face shapes such as round or Hexagonal to suit their aesthetic design requirements.

In our industry circular Access Panels have been available for some time, however, due to expensive tooling restrictions the industry have historically just offered sizes such as 300mm, 450mm and 600mm diameters.

Non Fire Rated
Simple yet flexible Unihatch design

Maximum Protection
Fully Polyester Powder Coated

Composition

Frame ▶ 1mm zintec welded construction

Door ▶ 1mm zintec folded all sides for rigid door shell

Coating ▶ Fully Polyester Powder Coated
RAL9010 Matt White
Other colours available

Lock ▶ Budget Lock as standard
Other locks available: tamper proof, key retaining, touch latch, 3 way lock, Europrofile ready etc.

Depth ▶ Frame Depth: 56mm - Door Depth: 32mm

Building Regulations

Part L ▶ **Thermal Resistance**
BS EN ISO 10077-1:2006
by Exova Warrington

Installer must follow guidelines set by the wall or ceiling manufacturer to ensure the correct properties are achieved for the environment. All reports have been produced by independent UKAS accredited testing centres, further details available upon request.

DISCLAIMER All suggestions on the use of our products within this document are made in good faith and without guarantee since the conditions of use are beyond the control of Ceildoor Products Limited. It is the installer's responsibility that: our products are installed according to the ceiling or wall manufacturer's recommendations related to access hatches; and are fit for its intended purpose before it is installed. We do not accept any liability for any loss, damage or claims arising from faulty or defective installation or the improper use of our goods. Ceildoor Products Limited pursue a policy of continuous product development and reserves the right to amend specifications without prior notice, please quote the issue number of this document to ensure the correct model of Access Panel is being specified.

Unit 5 Strawberry Lane Industrial Estate
Strawberry Lane, Wolverhampton, WV13 3RS

© Copyright Ceildoor Products Ltd

ILLUSION
THE SHAPE OF THINGS TO COME

Ceiling Environment

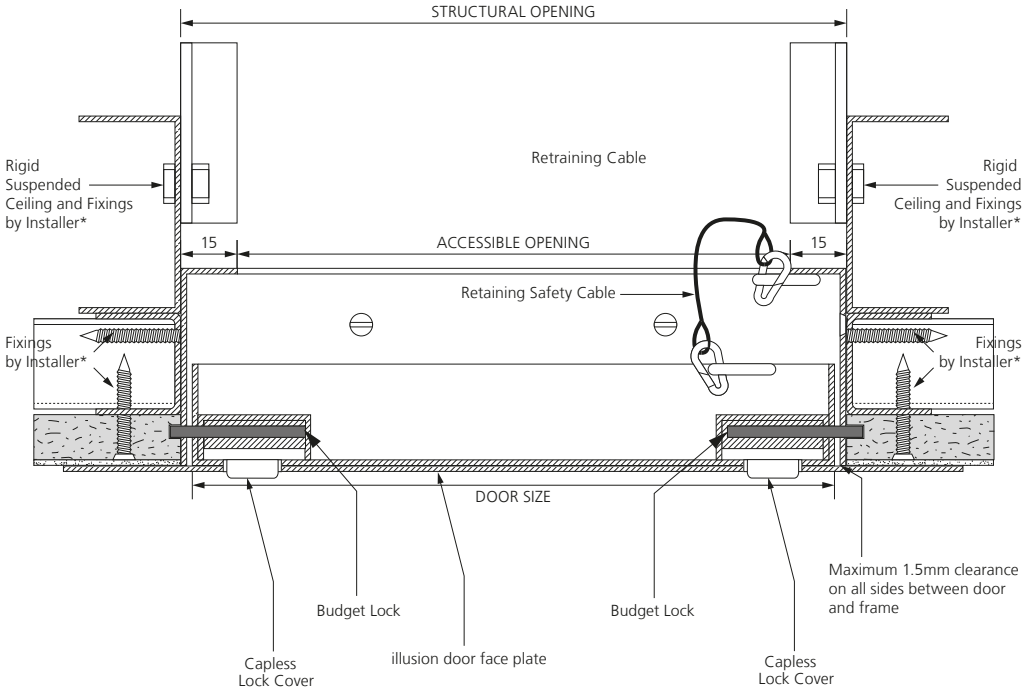

Wall Environment

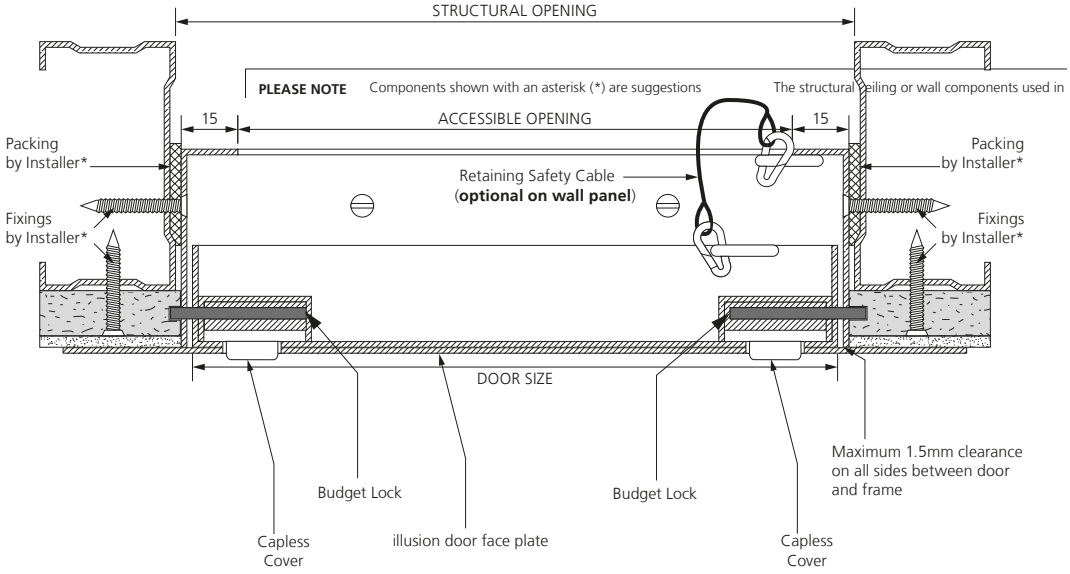

Fitting Guidelines

To calculate a sufficient opening for the frame, we recommend adding 10mm to the door size supplied. Alternatively when ordering an Access Panel to suit an opening, take away 10mm from your opening dimension to calculate a door size.

Frame should be screw fixed into the wall or ceiling opening using fixing holes located on the sides of the frame.

It is recommended that sufficient independent bracing and support is obtained to ensure safe opening and closing of the access hatch within its environment.

Please Note:

Drawing not to scale, reference purposes only. Components shown with an asterisk (*) are suggestions only. Always refer to guidance provided by your wall or ceiling manufacturer.

Legend

Plaster skim

Plasterboard

Standard Shape and Sizes

Our Illusion hatches are all made to order. Please get in touch for any requirements where we will be able to discuss sizing and structural opening guides with you.

Extra Protection Against Moisture and Corrosion

All Ceildoor metal Access Panels and hatches are fully powder-coated white RAL 9010 in matt polyester paint. Even though the majority of Access Panels in the industry are used internally, Ceildoor ensures all our products are coated in full polyester powder which is normally recommended for general exterior situations, where good weathering resistance is required against high levels of atmospheric moisture or in particularly aggressive atmospheres.

Security and Safety

It is extremely important to close and lock the Access Panel or hatch immediately after use. Failure to do so will affect and impair the performance of the environment where it has been installed in the event of fire.